

REVISION RECORD				
REV	ECN	DESCRIPTION	DWFT	DATE





Technical characteristics:
 Specifications
 DIN EN 60 664-1
 DIN EN 61 984

Inserts

01. Number of contacts : 3
02. Rated Current : 40A
03. Rated Voltage : 690V
04. Pollution degree : 3
05. Rated impulse voltage : 8kv₁₀
06. Insulation resistance : $\geq 10\Omega$
07. Material: Polycarbonate
08. Rated voltage acc. to UL: 600V
09. Limiting temperatures : -40°C~+125°C
10. Flammability acc. to UL94: V0
11. Mechanical working Life (mating cycles) : ≥ 500

Contacts

01. Material: Copper alloy
02. Surface: hard-silver plated
03. Contact resistance : $\leq 0.3m\Omega$
04. Terminal : Axial screw terminal
05. Hexagonal driver: SW2
06. Wire gauge : 6~10mm²
07. Tightening torque: 2Nm
08. Stripping length : 9~12mm
09. Rohs Compliance

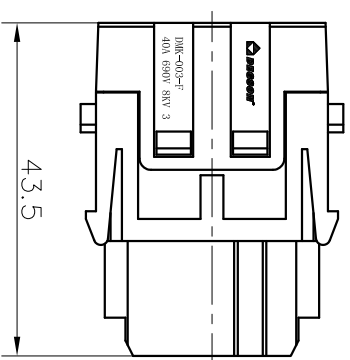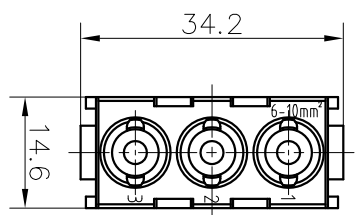

DETACHED LISTS			
PART NO.:	DMK-003-F(6~10mm ²)		
NAME:	NINGBO DEGSON ELECTRICAL CO., LTD		
APPD:			
CHKD:			
DWFT:	LJK	2017.10.10	
TITLE:	CUSTOMER DRAWING	REV	DO-1
DRAWING NO.:		SHEET	1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
			1:1