
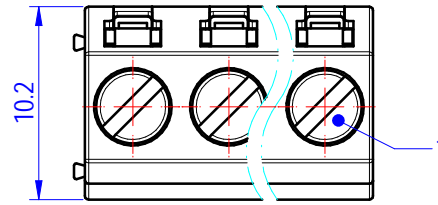






PCB LAYOUT

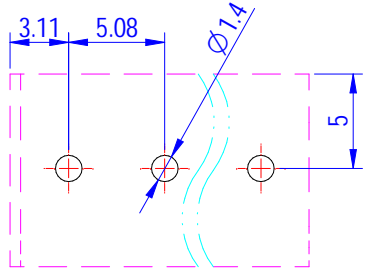

未注公差/General tolerances (mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	±2'	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/18	400/18	630/18
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.5		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG mm ²)	30~12/ 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	5.08/N= 02~24P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in general. We hereby reserve all rights for copyright. All rights reserved for patent. 除专利申明外，其他所有权利均保留。 未经授权，禁止复制或传播本文件内容。本公司保留对涉及发明、实用新型及外观设计专利的权利。 未经授权，禁止复制或传播本文件内容。 除专利申明外，其他所有权利均保留。

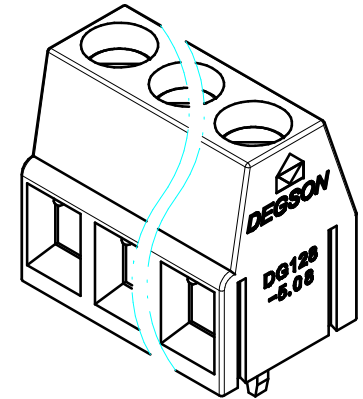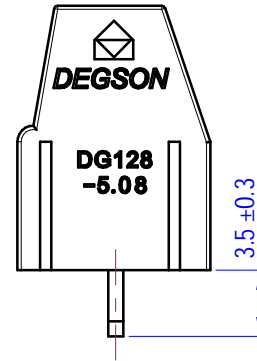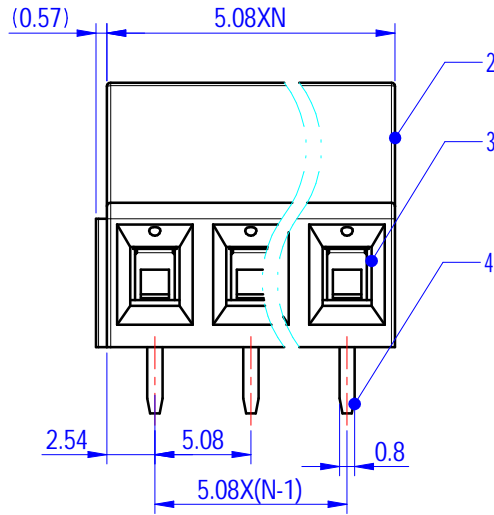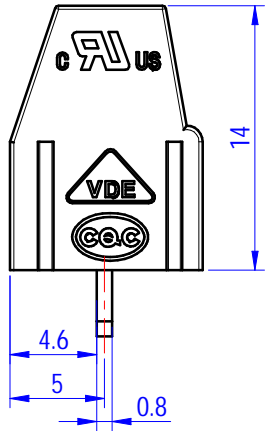

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper alloy	Sn Plated
3	Cage	Copper alloy	M3/Ni Plated
2	Housing	PA66	UL94V-0
1	Screw	Steel	M3/Zn Plated

		MATERIAL:	SURFACE/COLOR:		
		MAT NO./REV:	MAT STATUS: work		
APPD:	兰春华	2023.10.11	NAME		
CHKD:	张玉华	2023.10.11	DG128-5.08-XXP-1Y-1000A&Z (H)		
DRFT:	陈迪辉	2023.10.05	DRAWING NO.	TYPE	DRAWING STATUS
			200103681	CUSTOMER DRAWING	已发布
SCALE	2.5:1		SHEET		1/1

REV	ECN	DESCRIPTION	DRFT	DATE
01		1XAdd VDE Mark	陈迪辉	2023.10.05