
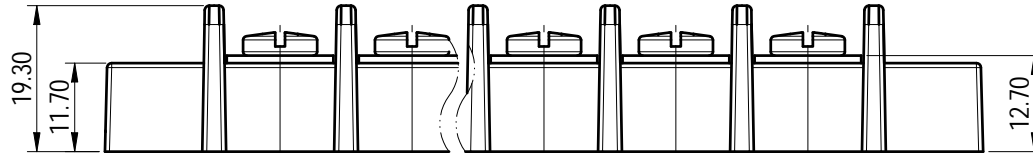


未注公差/General tolerances (mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Zn Plated
2	Current carrier	Copper alloy	Sn Plated
1	Housing	PC	UL94V-0

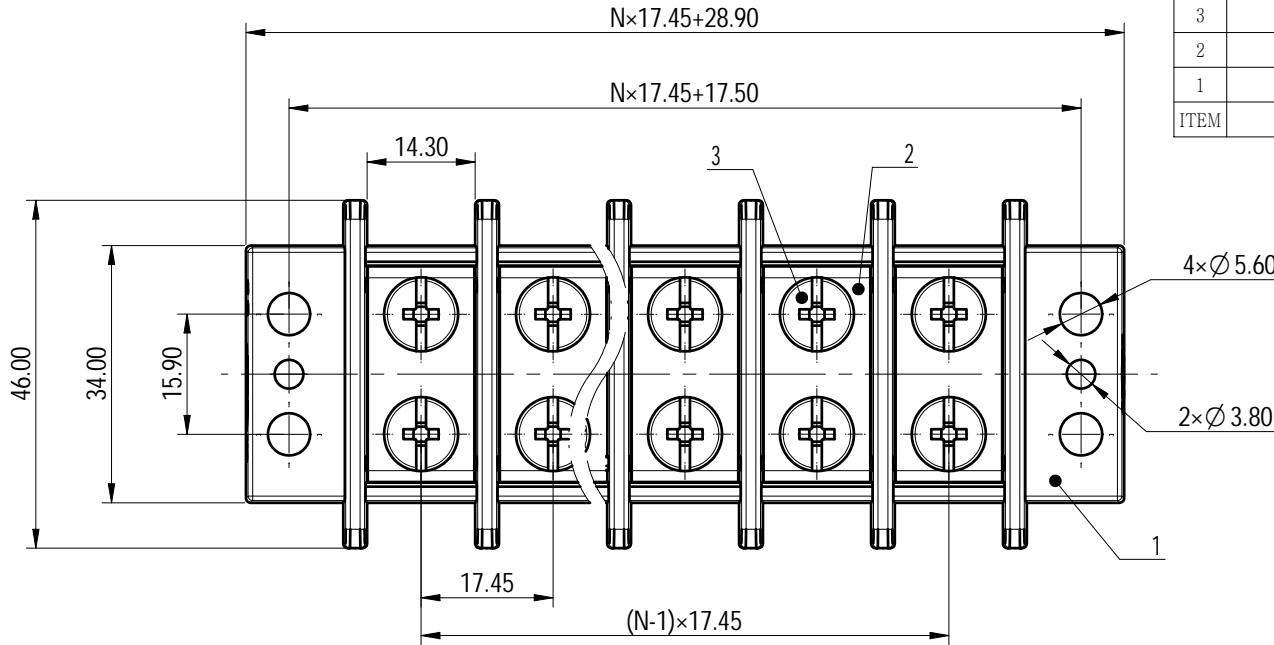

Note: The A&Z(H) in the name means: A(H) and Z(H).

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/30	600/30	/
	600/75	600/75	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M5, 1.9/17.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	10~14 (600V/30A)		
	4~14 (600V/75A)		
间距/Pitch(mm)/线数范围/Poles	17.45/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+125		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:	SURFACE/COLOR:		
APPD: 蓝贵凡 2023.05.16		MAT NO./REV: - / 00	MAT STATUS: 批量		
CHKD: 曹利彬 2023.05.16		NAME			
DRFT: 姜民洁 2023.05.16		DG99-A-XXP-1Y-00A&Z(H)			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET	
200194843	CUSTOMER DRAWING	已发布	1:1	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、商标、印刷、光磁等文件外，其他文件均受法律保护。 未经授权，不得复制或传播。 保留所有权利。